



BOX-117

E-Z-Go RXV

Utility Box Mounting Kit


Installation Instructions



Contents of BOX-117 Utility Box Mounting Kit:

- a (1 ea.) Utility Box Support Frame, Driver Side
- b (1 ea.) Utility Box Support Frame, Passenger Side
- c (1 ea.) Vertical Support Bracket
- d (1 ea.) Utility Box Mounting Bracket Boots
- f (1 ea.) Latch Kit (Contents on Next Page)
- e (1 ea.) Box of Hardware (Contents on Next Page)

Caution: Please read through the instructions carefully. Installer is responsible for damage if instructions are not followed properly. Look behind each drill or cut location BEFORE YOU DRILL OR CUT. Installer is responsible for damage (i.e. drilling/cutting into a wiring harness, battery, fuel tank etc.). Extra installers will be helpful in some parts of the installation. Refer to vehicle's maintenance manual for torquing specifications on reused hardware.

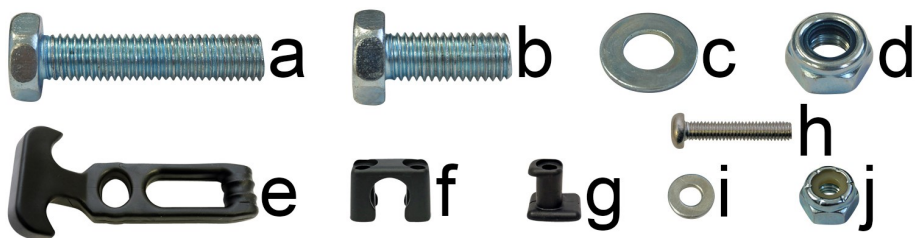


Contents of BOX-117 Hardware Kit		Qty.
a	10mm-1.5 x 45 Hex Head Bolts	2
b	10mm-1.5 x 25 Phillips Head Truss Bolts	6
c	10mm Flat Washers	10
d	10mm Nylock Nuts	8
e	Latches	2
f	Latch Mounting Brackets	2
g	Latch Catches	2
h	10-32 x 1" Pan Head Phillips Machine Screws	6
i	#10 Flat Washers	6
j	10-32 Nylock Nuts	6


Installation Preparation

1. Engage parking brake.
2. Turn key OFF.
3. Electric Carts Only: Place Tow/Run Switch in Tow.
4. Remove top.

NOTE: If reinstalling the top, keep the top attached to the front struts and prop up the rear of the top using a broom handle or similar tool. Retain hardware.

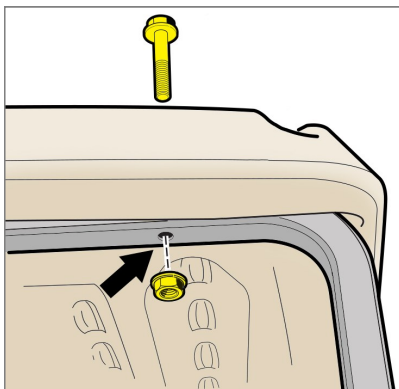


Front Strut (Driver Side)

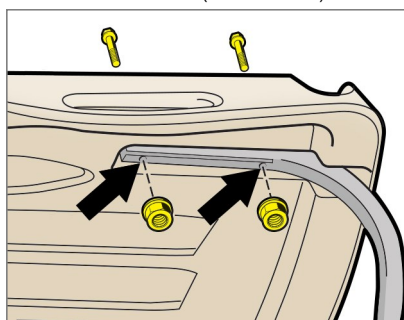



Rear Strut (Driver Side)

5. Remove the front seat back cushion (black arrows). Retain hardware.
6. Remove rear struts (white arrows).

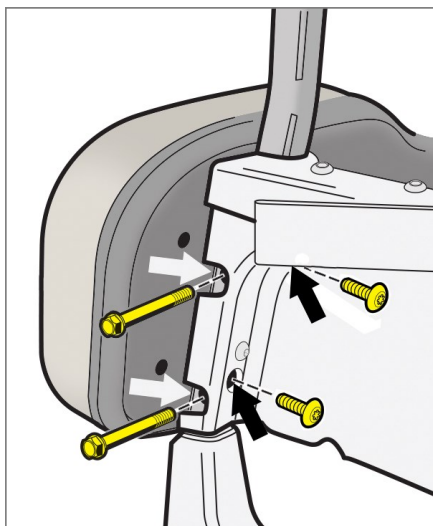


(Driver Side)

7. Remove sweater basket. Discard hardware.
8. Remove access panel. Retain hardware.

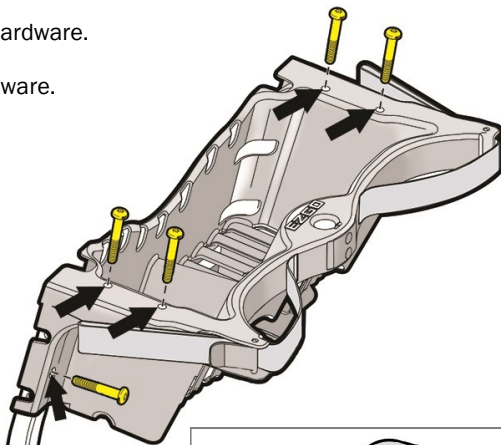

9. Remove both seat back support brackets and rubber boots. The brackets are attached to the frame, under the body.

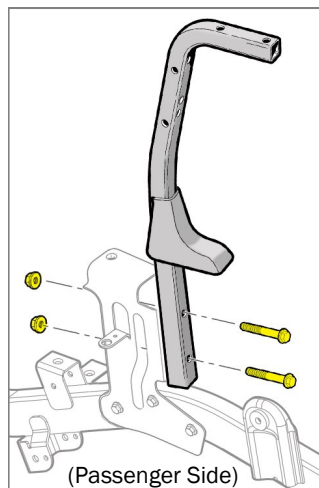


Utility Box Mounting Kit Installation


1. Slide a new boot around the bottom of each of the utility box support frames.
2. Install the utility box support frames where the original seat support brackets were installed. Mount using the Original Hardware.

NOTE: The alignment pins on the support frames will point upward towards the top of the cart.


3. Reinstall the access panel using the Original Hardware.

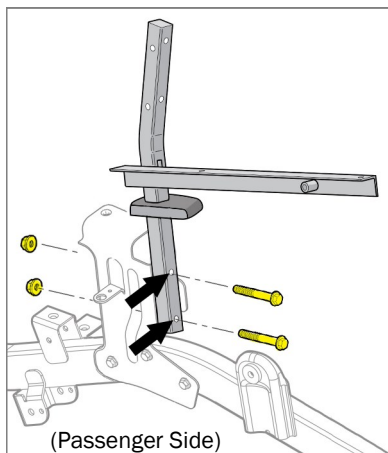

4. Remove the (2) OE Torx Bolts in the bagwell area. Loosely fasten the vertical support bracket to the bagwell area using the (2) Original Torx Bolts.

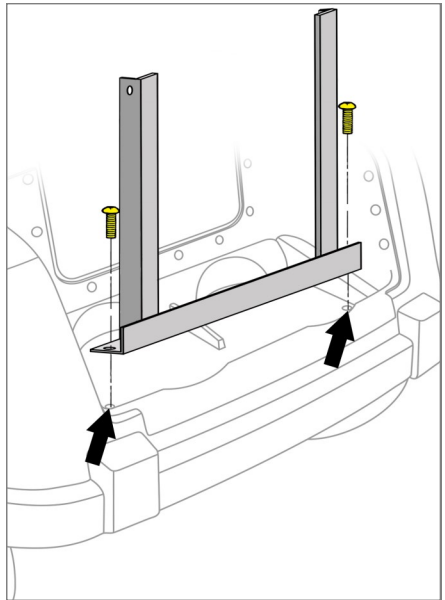

5. Fasten the original seat back to the utility box support frames using the Original Hardware removed on Page 3 (blue arrows).
6. If reinstalling the OE rear struts, install them to the utility box support frames using the Original Hardware (blue arrows).
7. Place the utility box on top of the utility box support frames. Fasten the utility box to the support frames using (4) 10mm-1.5 x 25mm Phillips Head Truss Bolts, (4) 10mm Flat Washers and (4) 10mm-1.5 Nylock Nuts.
8. Reinstall top using Original Hardware (if applicable).
9. Tighten all hardware.

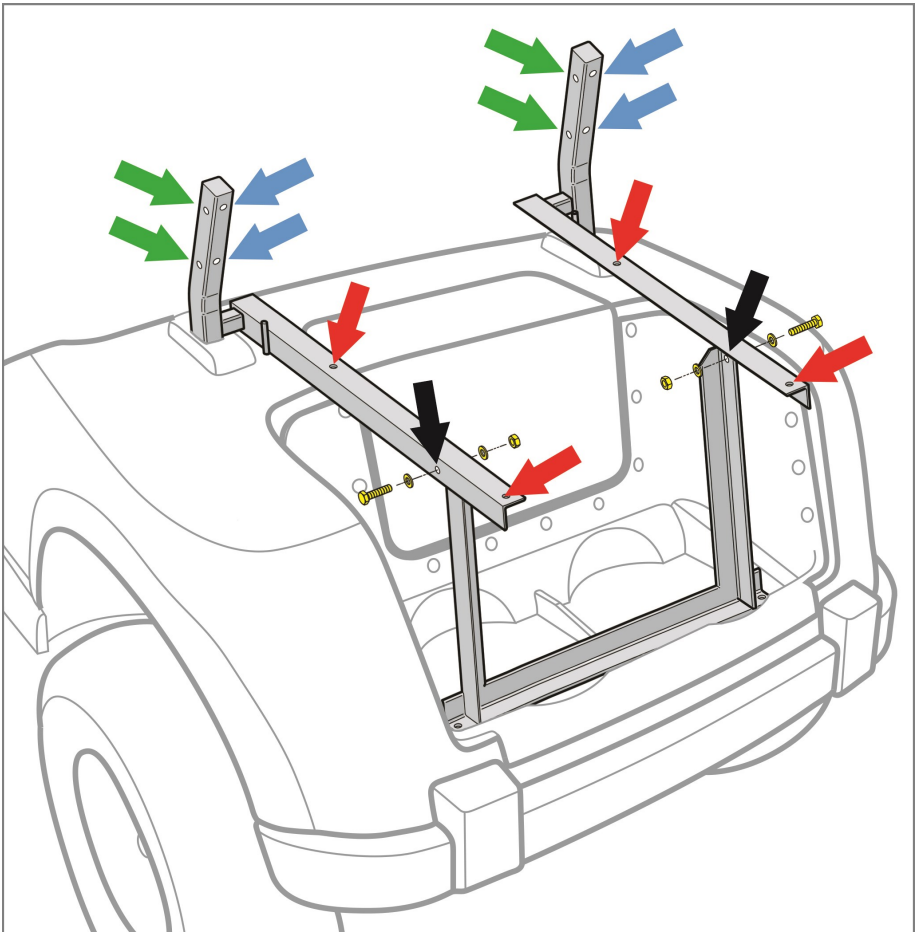

This completes the installation of your
RHOX Utility Mounting Kit and Utility Box. Please enjoy safely!

Scan QR code or use the link below to
view the installation video.

<https://vimeo.com/user39935056>



